

Lift and Transport Truck HTW 50/120 with Lateral Tipping Device



The lift and transport truck has a rugged, torsion-resistant frame structure and is made of powder coated steel (grey – RAL 7035). Additionally it has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling. 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, $d = 125$ mm with special roller bearings, permanently lubricated and maintenance-free, which ensure an absolutely noiseless movement. A stainless steel roller track comprising 6 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. The additional structure (lateral tipping device) can be tilted up by approx. 30° to the right side. It is acting with the integrated hydraulic unit (controlled by reversing valve). An anti-collision buffer is mounted to the front end.

Technical Data:

Dimensions lowest Position W/D/H:	2150 x 750 x 320 mm
Dimensions highest Position W/D/H:	2150 x 750 x 1650 mm
Carrying capacity:	max. 250 kg
Dead weight:	approx. 100 kg
Tipping:	approx. 30° to the right side
Material:	Steel
Colour:	Lightgrey RAL 7035 (powder coated)
Type:	HTW 50/120
Article No.:	050.040.010

Lift and Transport Truck HTW 50/120 – 350 kg

Material: Steel

Article No.: 050.040.020


Additional models see back page

KUGEL medical GmbH & Co. KG
Hermann-Köhl-Str. 2A
DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0
Fax +49/941/20 86 48-29
www.KUGEL-medical.de



Lift and Transport Truck HTW 51/120 with Lateral Tipping Device

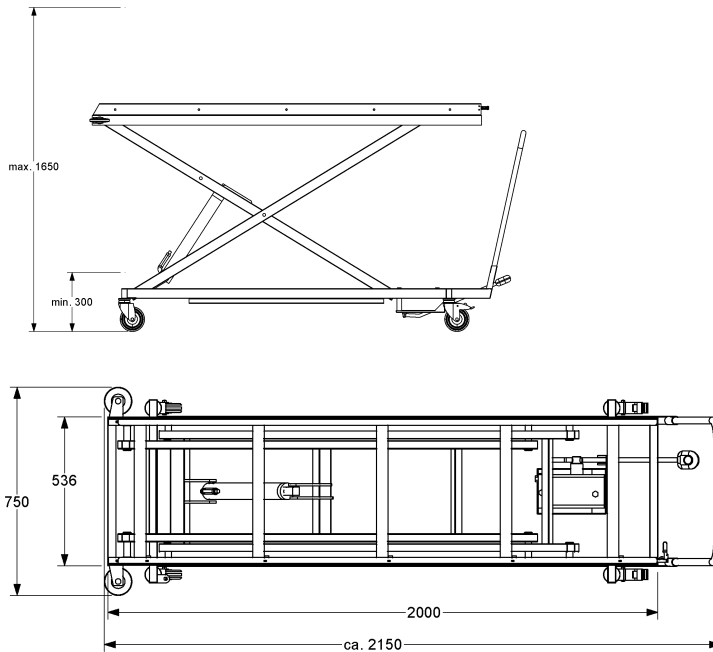

TekEquipment™

Ph: 1300 368 138

www.tekequipment.com.au

info@tekequipment.com.au

TekMed NZ™

Ph: 0800 456 217

info@tekmed.co.nz

www.tekmed.co.nz

The lift- and transport truck has a rugged, torsion-resistant frame structure and is completely made of stainless steel (Material no. 1.4301 – ANSI 304). Additionally, it has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling. 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, $d = 125$ mm with special roller bearings, permanently lubricated and maintenance-free, which ensure an absolutely noiseless movement. A stainless steel roller track comprising 6 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. The additional structure (lateral tipping device) can be tilted up by approx. 30° to the right side. It is acting with the integrated hydraulic unit (controlled by reversing valve). An anti-collision buffer is mounted to the front end.

Technical Data:

Dimensions lowest Position W/D/H:	2150 x 750 x 320 mm
Dimensions highest Position W/D/H:	2150 x 750 x 1650 mm
Carrying capacity:	max. 250 kg
Dead weight:	approx. 100 kg
Tipping:	approx. 30° to the right side
Material:	Stainless steel (Material No. 1.4301 – ANSI 304)
Type:	HTW 51/120
Article No.:	050.110.010

Lift and Transport Truck HTW 51/120 – 350 kg:

Material: Stainless Steel Article No.: 050.110.020

KUGEL medical GmbH & Co. KG
Hermann-Köhl-Str. 2A
DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0
Fax +49/941/20 86 48-29
www.KUGEL-medical.de



KUGEL
medical